RoHS

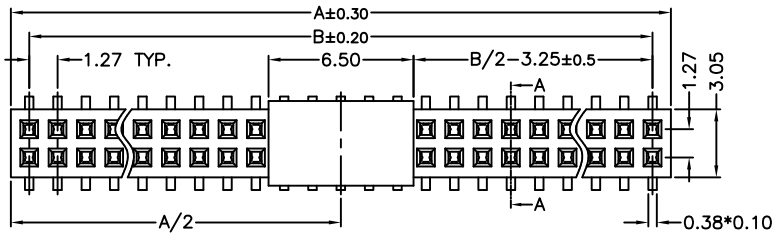



SECTION A–A
SCALE 2:1

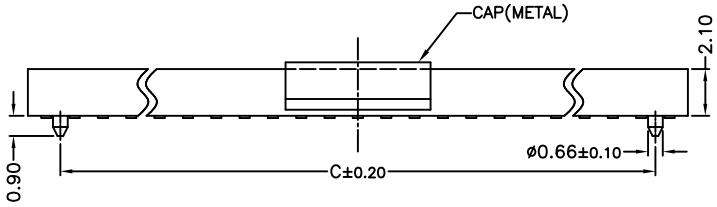

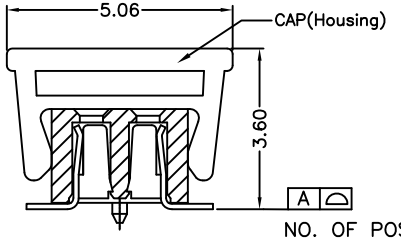

NO. OF POSITIONS
2*2~2*20 A=0.10mm
2*21~2*40 A=0.15mm

SECTION A–A
SCALE 2:1





SECTION A–A
SCALE 2:1

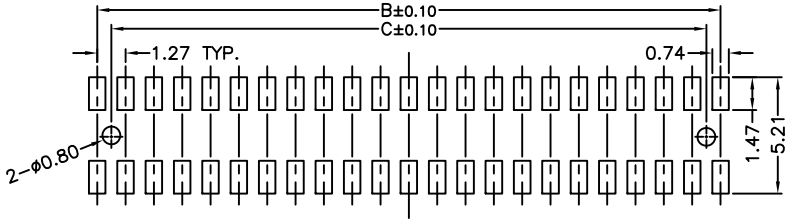

RECOMMENDED OF PC BOARD Holes
Tolerance:±0.05 (Top View)

NOTE:
1. @ MEANS KEY DIMENSIONS, MUST BE CHECKED.
2. MATERIAL:
   2.1 CONTACT: PHOSPHOR BRONZE.
   2.2 HOUSING: UL94 V-0 (BLACK)
   2.3 FINSH: NICKEL UNDER GOLD FLASH OVER ALL.
3. ALL MATERIAL MUST BE COMPLY WITH RoHS OR HF.
4. PART NO. LEGEND:
   5F1.X33XX-AXX00.2XX

2:RoHS.
3:RoHS & HF.

NO. OF POSITIONS
11:GOLD FLASH, WITHOUT CAP, TUBE.
12:GOLD FLASH, WITH CAP(Metal), TUBE.
17:GOLD FLASH, WITH CAP(Metal), REEL.
19:GOLD FLASH, WITH CAP(Housing), TUBE.
20:GOLD FLASH, WITH CAP(Housing), REEL.
40:GOLD 10U", WITHOUT CAP, TUBE.
41:GOLD 10U", WITH CAP(Housing), REEL.
44:GOLD FLASH, Mylar, REEL.
53:GOLD FLASH, Mylar, TUBE.

4B:PA6T WITHOUT PEG N/M
5B:PA6T WITH PEG N/M
A1:PA9T WITH PEG N/M
A5:PA9T WITHOUT PEG N/M
7G:LCP WITH PEG N/M

USE NO.	NO. OF POSITIONS	A	B	C
	02	2.94	1.27	/
	03	4.21	2.54	1.27
	04	5.48	3.81	2.54
	05	6.75	5.08	3.81
	06	8.02	6.35	5.08
	07	9.29	7.62	6.35
	08	10.56	8.89	7.62
	09	11.83	10.16	8.89
	10	13.10	11.43	10.16
	11	14.37	12.70	11.43
	12	15.64	13.97	12.70
	13	16.91	15.24	13.97
	14	18.18	16.51	15.24
	15	19.45	17.78	16.51
	16	20.72	19.05	17.78
	17	21.99	20.32	19.05
	18	23.26	21.59	20.32
	19	24.53	22.86	21.59
	20	25.80	24.13	22.86
	21	27.07	25.40	24.13

USE NO.	NO. OF POSITIONS	A	B	C
	22	28.34	26.67	25.40
	23	29.61	27.94	26.67
	24	30.88	29.21	27.94
	25	32.15	30.48	29.21
	26	33.42	31.75	30.48
	27	34.69	33.02	31.75
	28	35.96	34.29	33.02
	29	37.23	35.56	34.29
	30	38.50	36.83	35.56
	31	39.77	38.10	36.83
	32	41.04	39.37	38.10
	33	42.31	40.64	39.37
	34	43.58	41.91	40.64
	35	44.85	43.18	41.91
	36	46.12	44.45	43.18
	37	47.39	45.72	44.45
	38	48.66	46.99	45.72
	39	49.93	48.26	46.99
	40	51.20	49.53	48.26

△	DATE	ECR
△		
△		
△		
△		

ARC ELECTRO INDUSTRY CORP.
www.arc-electro.com

PART NAME: FPH P1.27 SMT DUAL ROWS
PART NUMBER: 5F1.X33XX-AXX00.2XX

S/C NO

APPROVAL	CHECKED	DRAWING	DRAWING NO	DATE	REV	SCALE	UNIT	NO.
David	David	David	AK00312	210304	2.1		mm	1/1

TOLERANCE:
.X ±0.30
.XX ±0.25
.XXX ±0.10

B1184
D002-S301

5GC.BD.0010A